



**STANDARD DEPARTURE CHART -
INSTRUMENT (SID) - ICAO**

TRANSITION ALT 10500 FT
TRANSITION LEVEL BY ATC

TWR 133.600
125.500
362.550
121.500
243.000

ATIS 127.205

**PLOVDIV
RNAV Rwy 12**
RUMEN 3B, RUMEN 3K,
ROVDO 2B

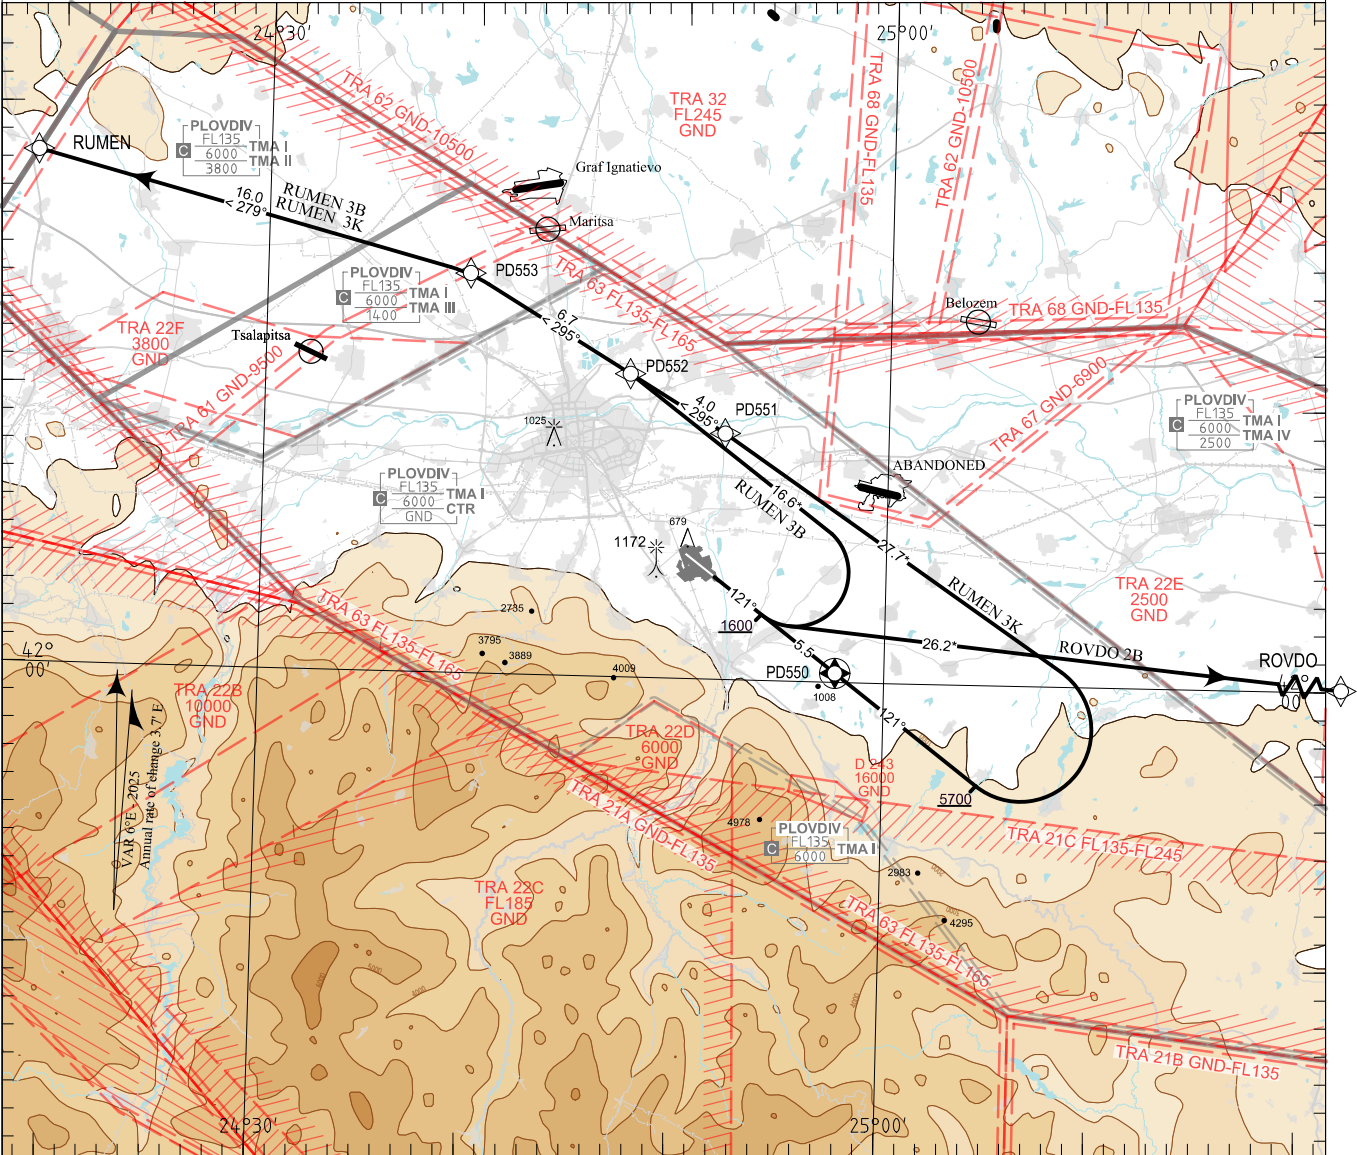

ALTITUDES (HEIGHTS) AND ELEVATIONS IN FEET
DISTANCES IN NM
* Distances marked by * are approximate distances from DER

Restrictions:
In case of activation of TRA 67 or TRA 61
RUMEN 3B may not be available.
In case of activation of TRA 63 all departures may be required to
maintain 10000 FT until leaving horizontal limits of TRA 63.

Certification:
RNAV 1 certification based on GNSS is required
for the RNAV departure procedures

AFTER TAKE-OFF:
Proceed according to cleared departure procedure to the level
assigned by ATC. Strictly follow the prescribed procedure profile,
unless the restrictions are explicitly cancelled by ATC.
If unable to comply inform ATC in good time so that alternative
clearance can be issued.

DEPARTURE PROCEDURES:
See coding on the verso of the chart.

P/T	WPT ID	Flyover	Track MAG (GEO)	DIST NM	Turn Direction	Speed KT	ALT/FL FT	Additional Requirement
ROVDO 2B ROVDO TWO BRAVO DEPARTURE								
<i>MNM climb gradient of 6.2% (377FT/NM) to 10500FT AMSL</i>								
CA	-	-	121°(127.2°T)	-	Left	-	A1600+	-
DF	ROVDO	-	-	-	-	-	A10500+	-
RUMEN 3B RUMEN THREE BRAVO DEPARTURE								
<i>MNM climb gradient of 5% (304FT/NM) to 3500FT AMSL</i>								
CA	-	-	121°(127.2°T)	-	Left	-	A1600+	-
DF	PD552	-	-	-	-	-	-	-
TF	PD553	-	295°(300.8°T)	6.7	Left	-	-	-
TF	RUMEN	-	279°(284.6°T)	16.0	-	-	-	-
RUMEN 3K RUMEN THREE KILO DEPARTURE								
<i>MNM climb gradient of 5% (304FT/NM) to 5700FT AMSL</i>								
CF	PD550	Yes	121°(127.2°T)	5.5	-	-	-	-
CA	-	-	121°(127.2°T)	-	Left	-	A5700+	-
DF	PD551	-	-	-	-	-	-	-
TF	PD552	-	295°(300.8°T)	4.0	-	-	-	-
TF	PD553	-	295°(300.8°T)	6.7	Left	-	A10000	-
TF	RUMEN	-	279°(284.6°T)	16.0	-	-	A10000	-

See page LBDP AD 2 - 61.1 for waypoint coordinates