


TRANSITION ALT 10500 FT	APP 124.230	TWR 119.505	ATIS 126.880
TRANSITION LEVEL BY ATC	128.815	118.905	
	233.250	296.725	
	121.500	121.500	
	243.000	243.000	

VARNA
RNAV RWY 27
BALIK 3P, IVGOT 4P, NEDSI 3P,
RUTAR 4P, DICXA 1P

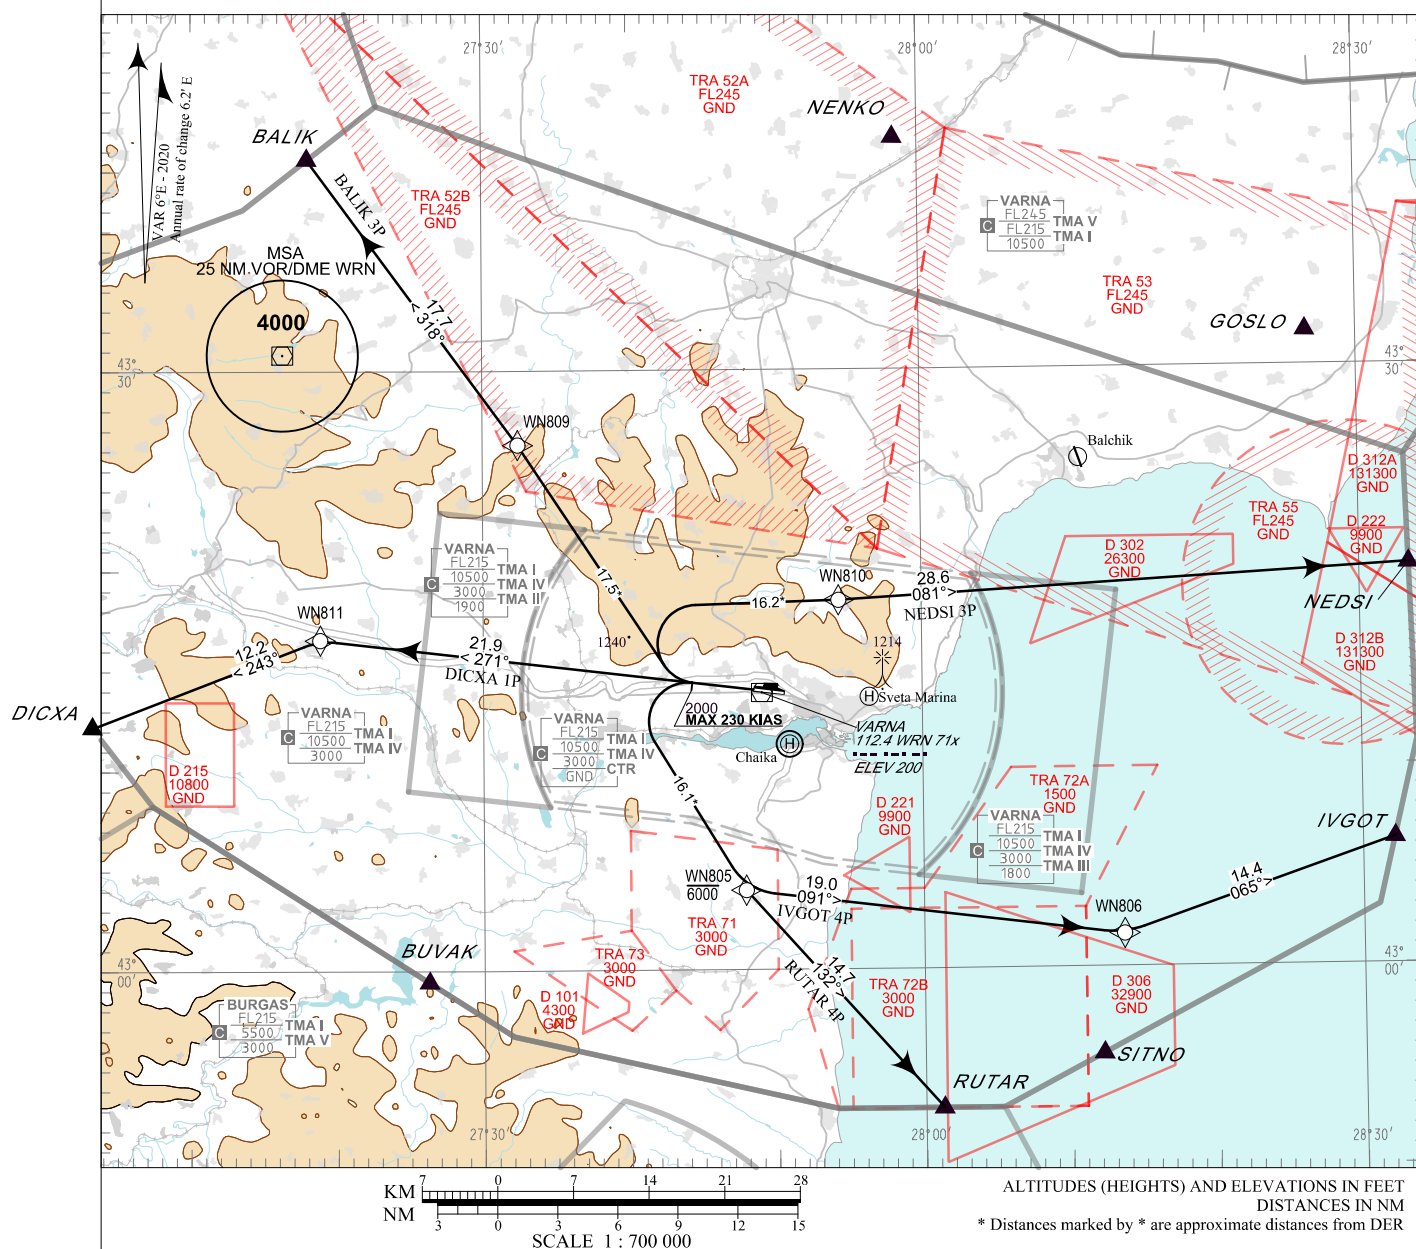

When given a clearance to a level higher than the specified in the SID, follow published SID profile, unless restrictions are explicitly cancelled by ATC.

P/T	WPT ID	Flyover	Track MAG (GEO)	DIST NM	Turn Direction	Speed KT	ALT FT	Additional Requirements
BALIK 3P BALIK THREE PAPA DEPARTURE								
<i>MNM climb gradient of 5.0% (304 FT/NM) to 4000FT AMSL.</i>								
CA	-	-	271°(276.9°T)	-	Right	230-	2000+	-
DF	WN809	-	-	-	-	-	-	-
TF	BALIK	-	318°(323.8°T)	17.7	-	-	-	-
DICXA 1P DICXA ONE PAPA DEPARTURE								
<i>MNM climb gradient of 5.0% (304 FT/NM) to 4000FT AMSL.</i>								
CF	WN811	-	271°(276.9°T)	21.9	Left	-	-	-
TF	DICXA	-	243°(249.1°T)	12.2	-	-	-	-
IVGOT 4P IVGOT FOUR PAPA DEPARTURE								
<i>MNM climb gradient of 5.0% (304 FT/NM) to 4000FT AMSL.</i>								
CA	-	-	271°(276.9°T)	-	Left	230-	2000+	-
DF	WN805	-	-	-	Left	-	6000-	-
TF	WN806	-	091°(096.9°T)	19.0	Left	-	-	-
TF	IVGOT	-	065°(071.0°T)	14.4	-	-	-	-
NEDSI 3P NEDSI THREE PAPA DEPARTURE								
<i>MNM climb gradient of 5.0% (304 FT/NM) to 4000FT AMSL.</i>								
CA	-	-	271°(276.9°T)	-	Right	230-	2000+	-
DF	WN810	-	-	-	-	-	-	-
TF	NEDSI	-	081°(086.6°T)	28.6	-	-	-	-
RUTAR 4P RUTAR FOUR PAPA DEPARTURE								
<i>MNM climb gradient of 5.0% (304 FT/NM) to 4000FT AMSL.</i>								
CA	-	-	271°(276.9°T)	-	Left	230-	2000+	-
DF	WN805	-	-	-	-	-	6000-	-
TF	RUTAR	-	132°(138.1°T)	14.7	-	-	-	-

See page LBWN AD 2 - 61.1 for waypoint coordinates